<u>E</u>

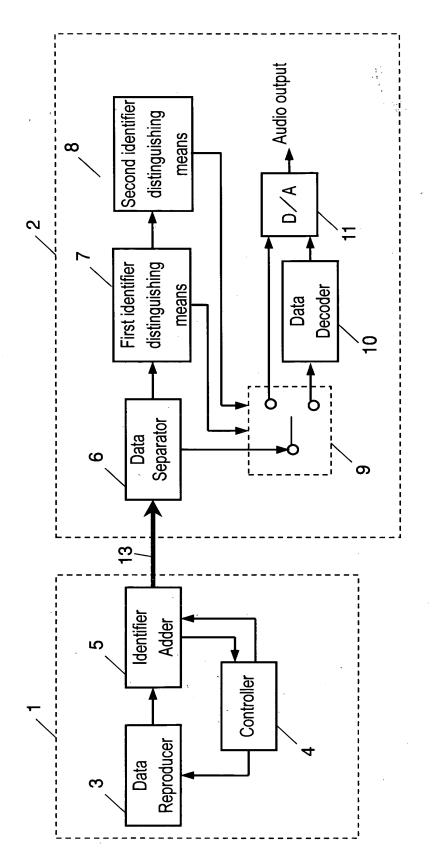


FIG. 2

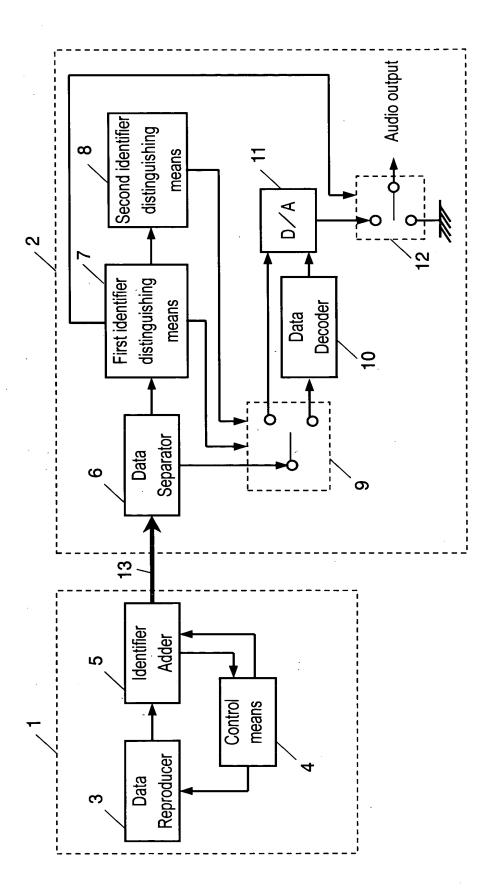


FIG. 3


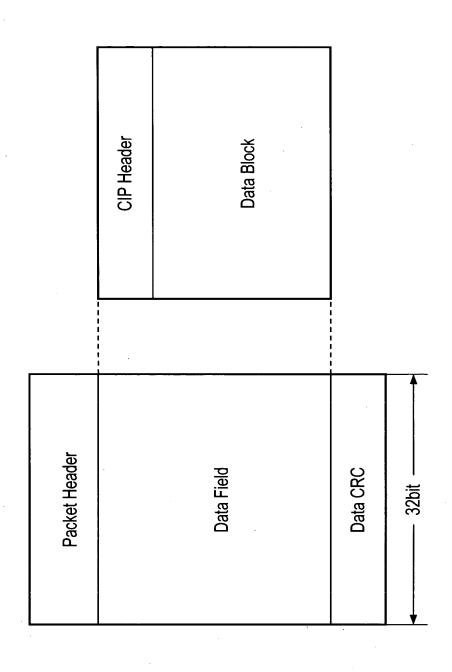


FIG. 4

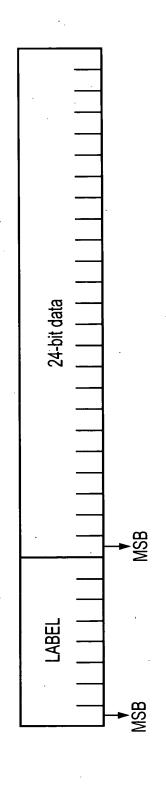

LABEL definition

00-3F 40-43	IEC60958 Conformable Raw Audio
44-7F 80-83 84-FF	MIDI Conformable -Reserved-

FIG. 5

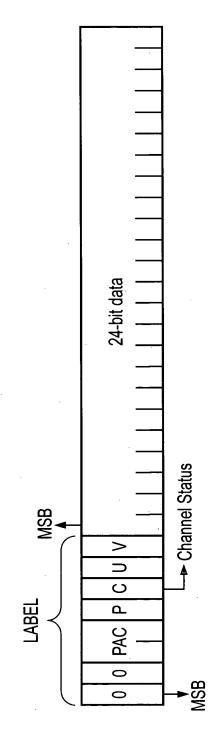


FIG. 6

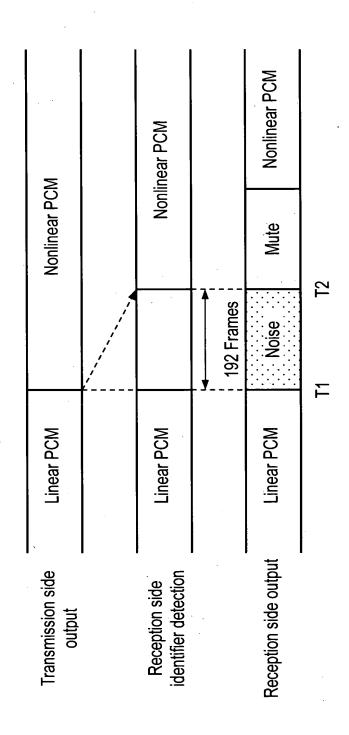


FIG. 7

PCM	PCM	
Nonlinear PCM	Nonlinear PCM	
Silent identifier	Silent identifier	
Linear PCM	Linear PCM	
Transmission side output	Reception side identifier detection	

<u>Б</u>.

				Σ
Ionlinear PCM	Nonlinear PCM	Ionlinear PCM		Nonlinear PCM
2		,	Mute	
Silent identifier		Silent identifier		Zero data
Linear PCM		Linear PCM		Linear PCM
Transmission side output		Reception side identifier detection		Reception side output

FIG. 9

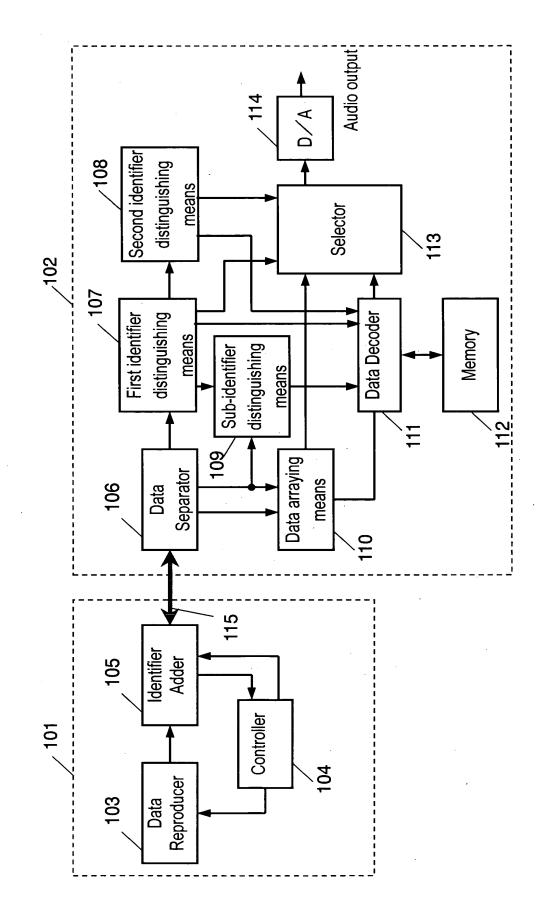


FIG. 10

Isochronous packet header	Common isochronous packet (CIP) header	} Data block 1	} Data block 2		Data block n
C—— Data length ——	0.0 ← SID ★ DBS → FN ←QPC→ SRSV← DBC ← 1.0 ← FMT ★ FDF	C Silent identifier	Silent identifier	••	: Data GRC

FIG. 11

Isochronous packet header Common isochronous	<pre>packet (CIP) header)</pre>	Data block 1) Data block 2		Data block n
ata length	10 ← FMT ★ FDF ★	C Silent identifier	C Identifier D X Sub-identifier X Ancillary data 2 CONTRACT Sub-identifier X ID-B Information X Pseudo-random data CONTRACT CONTR	Silent Identifier	: Data GRC

FIG. 12

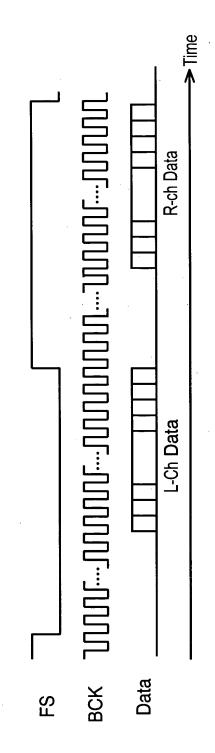


FIG. 13

	•	_			•	
DVD format (96kHz 5.1ch)		DVD format (96kHz 5.1ch)	96kHz 5.1ch Reproduction		DVD format (96kHz 5.1ch)	
Silent identifier ID-B information	← 75 →	Silent identifier ID-B information	PLL pull-in, etc.		Mute	
Silent identifier ID-A information	1	Silent identifier ID-A information	 ldling		Mute	
IEC60958 format (AC3)		IEC60958 format (AC3)	AC3 decode (48kHz)		AC3	
Transmission side output		Reception side identifier detection	Reception processing	- '	Audio output	•

↓ Time

FIG. 14

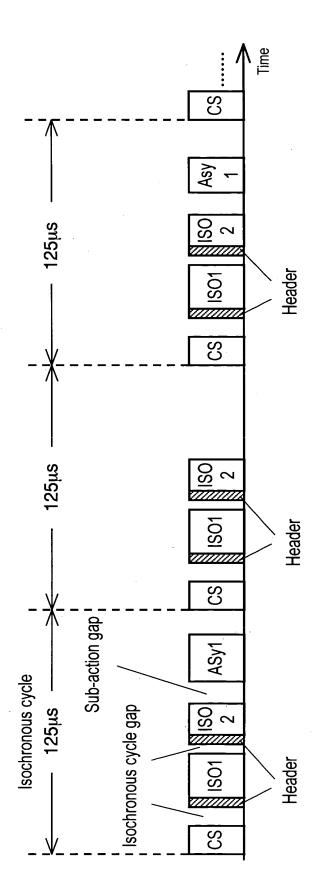


FIG. 15

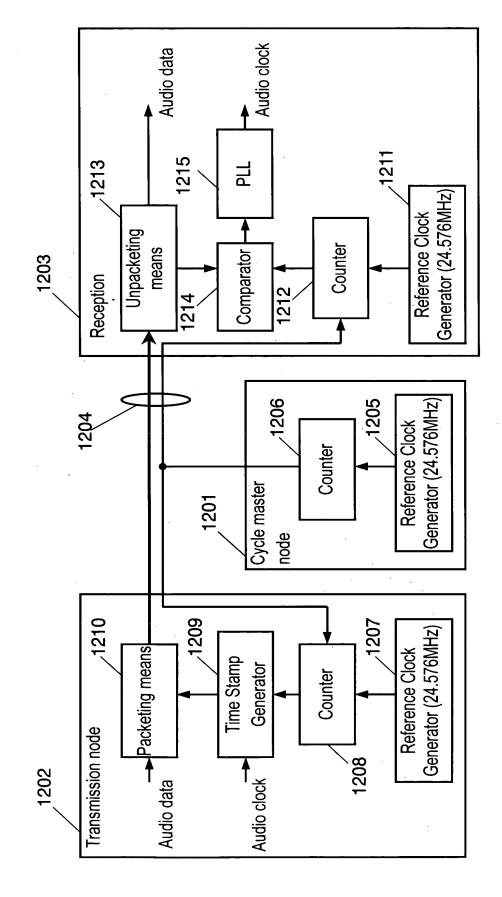


FIG. 16

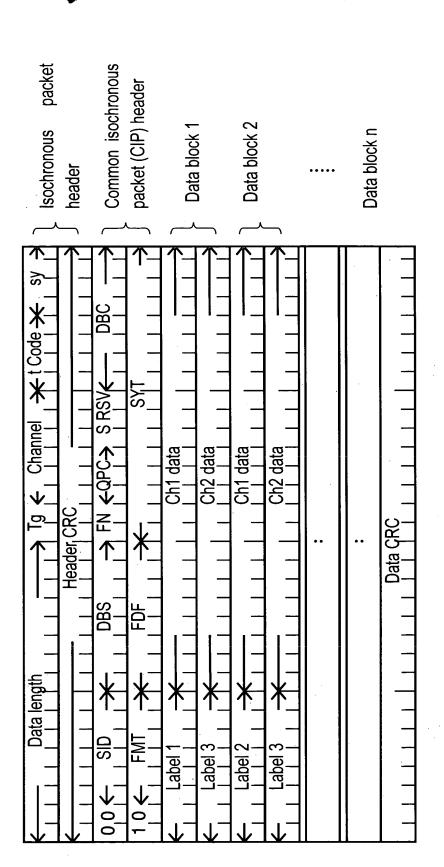


FIG. 17

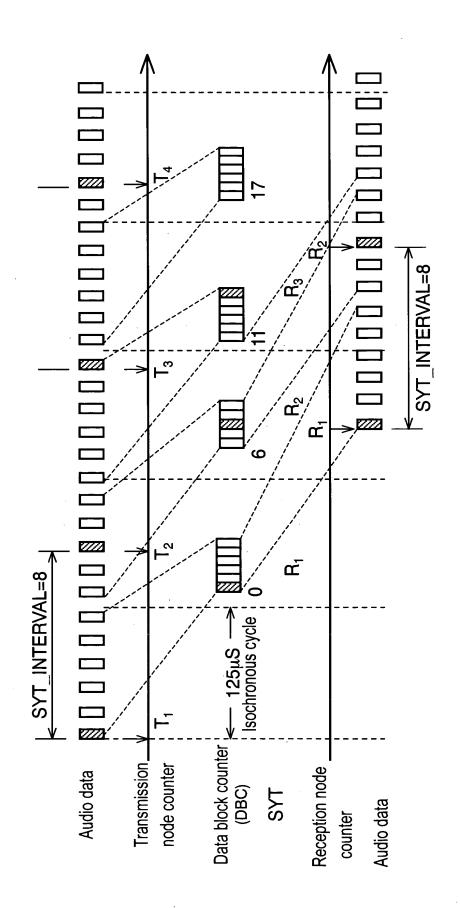


FIG. 18

	DVD format (96kHz 5.1ch)		DVD format (96kHz 5.1ch)		96 kHz, 5.1ch reproduction		DVD format (96kHz 5.1ch)	
6)		· :)		PLL pull-in, etc.		Mute	
	Silent identifier	Silent identifier					Zero data	
	IEC60958 format (AC3)		IEC60958 format (AC3)		AC3 decode (48kHz)	,	AC3	
	Transmission side output		Reception side identifier detection	ı	Reception processing		Audio output	•